## Print & Cut LED-UV Curable Inkjet Printer

Speedy and easy printing and cutting by just one unit. Upcoming line of UCJV300 series!





**UCJV300-75** 

0.8m width

Printable up to 800mm width Small foot-print and versatile model covering wide range of stickers, labels and point of sales materials making.



UCJV300-107

1.1m width

Printable up to 1090mm width Quick printing and cutting to apply a BO size poster of commercial print besides promotional items of various type of media.



UCJV300-130

1.3m width

Printable up to 1361mm width Suitable for both signage and point of marketing materials. Quick processing without ink drying time by UV-LED to reduce the working time significantly for orders in short delivery time.



UCJV300-160

1.6m width

Printable up to 1610mm width Applicable to large format sign, long-sized sticker, vehicle

Reliable functions for Print & Cut to wide sized print production.

# **UCJV150-160**

Entry model for LED-UV Print & Cut Superior cost-effectiveness 1.6 meter width model to fulfill customer various demands.




#### Specifications

ltem			UCJV300-75	UCJV300-107	UCJV300-130	UCJV300-160	UCJV150-160				
Print	t head			·	On-demand piezo head						
Print resolution			300dpi , 600dpi , 900dpi , 1200dpi								
Droplet size					Min. 7pl , Max. 28pl						
Head gap			3 degrees adjustable (2.0/2.5/3.0mm) by manual								
	Туре				LED-UV ink						
lnk				LUS-170/200							
Ink	Color		LUS-170(C,N	LUS-170(C,M,Y,K,Lc,Lm,W / C,M,Y,K,Cl,W / C,M,Y,K) LUS-200(C,M,Y,K,W / C,M,Y,K)							
	Capaci	у	IL (Bottle supply)								
Max. print width			800mm (31.5in)	1,090mm ( 42.9in )	1,361mm (53.5 in)	1,610mm ( 63.4in )					
Max. media width			810mm ( 31.9in )	1,100mm ( 43.3in )	1,371mm (54.0 in)	1,620mm ( 63.8in )					
Media t	thickness		1.0 mm or less								
Media roll o	uter diamet	er	250mm or less								
Media re	oll weight		40kg ( 88.2 lb ) or less								
Cut	speed		Max. 300mm/s (420mm/s in 45 degrees direction)								
Cut p	ressure		10 - 450gf								
Contra			Eccentric cutter, Blade for small character, Blade for reflective sheet								
Cutte	er types		Blade for fluorescent sheet, Standard blade for vinyl								
			VCCI Class A / FCC Class A / Compliant with UL 60950-1, ETL								
Safety standard			CE Marking ( EMC, Low Voltage, Machinery Directive ), RoHS								
			CB Report / REACH · ENERGY STAR / RCM								
Inte	rface		USB2.0 / Ethernet1000 BASE-T								
Power	r supply		Single phase AC100 - 120/200-240V ± 10%, 50 / 60Hz ± 1Hz								
Power co	nsumption		AC100V:1.44kW/AC200V:1.92kW or less								
Operational	lenvironme	nt	Temperature : 20-30 degC / 68-86 degF, humidity : 35-65% Rh ( No condensing )								
Outside din	nensions r	nm	2,090 × 776 × 1,475	2,380 × 776 × 1,475	2,650 × 776 × 1,475	2,900 × 7	76 × 1,475				
(W×D	×H)	in	82.3 × 30.6 × 58.1	93.7 × 30.6 × 58.1	104.3 × 30.6 × 58.1	114.2 × 30.6 × 58.1					
Weig	ht k	a/lb	139 / 306.4	156 / 343.9	172 / 379.2	188 / 414.5	183 / 403.4				

#### Supplies

D					
Product name	Color	ltem code	Remarks		
	Cyan	LUS17-C-BA			
	Magenta	LUS17-M-BA	1L bottle		
	Yellow	LUS17-Y-BA			
LUS-170	Black	LUS17-K-BA			
LU3-1/U	Light Cyan	LUS17-LC-BA			
	Light Magenta	LUS17-LM-BA	1		
	White	LUS17-W-BA			
	Clear	LUS17-CL-BA	1		
	Cyan	LUS20-C-BA			
	Magenta	LUS20-M-BA	1L bottle		
LUS-200	Yellow	LUS20-Y-BA			
	Black	LUS20-K-BA	1		
	White	LUS20-W-BA	1		

#### Software

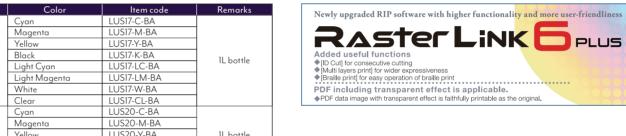

#### Print speed

UCJV300 Series (4C 1Layer) LUS-170/LUS-200							UCJV150-160 (4C 1Layer) LUS-170/LUS-200							
	Model		UCJV300-75	UCJV300-107	UCJV300-130	UCJV300-160	Model UCJV15					)-160		
	Print mode		Print speed (m³/h)				Print mode				F	Print speed (m³/h)		
Draft	300x600 4P	Bi/STD	18.0	21.5	24.0	25.8	Draft	300x600	98 C	Bi/S	STD	13.4		
High Speed	300x900 6P	Bi/STD	14.2	17.0	19.1	20.6	High Spee	d 300x900	300x900 12P		STD	10.6		
Standard	600x6008P	Bi/Hi	10.8	13.0	14.6	15.7	Standard	600x600	600x60016P		Hi	8.0		
Quality	600x120016P	Bi/Hi	5.6	6.7	7.5	8.0	Quality	600x1200	600x1200 32P		Hi	4.0		
High Quality	1200x1200 16P	Bi/Hi	3.5	4.1	4.5	4.7	High Quali	ality 1200x1200 32		Bi/	'Hi	2.4		
	UCJV300 Serie	s (5C/6C	/7C 1Layer) (LU	IS-170:6C/7C LU	JS-200:5C)		UCJV300-160	) (5C/6C/7C Multi	layers	s) (LUS-I	70:6C/7	C LUS-2	00:5C)	
Model			UCJV300-75	UCJV300-107	UCJV300-130	UCJV300-160	Model 21			2 layer	3 layer	4 layer	5 layer	
Print mode			Print speed (m³/h)			Print mode			Print speed (m³/h)					
Draft	300×600 8P	Bi/STD	9.6	11.3	12.6	13.4	High Speed	300x90012P	Bi	5.4	3.6	2.7	2.1	
High Speed	300x900 12P	Bi/STD	7.4	8.9	9.9	10.6	Standard	600x60016P	Bi	4.0	2.7	2.0	1.6	
Standard	600x60016P	Bi/Hi	5.6	6.7	7.5	8.0	Quality	600x1200 32P	Bi	2.0	1.3	1.0	0.8	
Quality	600x1200 32P	Bi/Hi	2.9	3.4	3.8	4.0	High Quality	1200x1200 32P	Uni	1.2	0.8	0.6	0.5	
High Quality	1200x1200 32P	Bi/Hi	1.8	21	2.3	2.4								

#### ⚠ Inks and substrates:

Please note that descriptions and data in this catalogue are as of April 2019.

Please note that properties and adhesion, weather resistance, etc. of ink and substrates can vary. Please test materials before

Safety notice: These printers produce UV radiation.

To protect your health, please observe the following guidelines carefully: • Do not look directly into the UV light source, or expose your skin (such as your hands) directly to the UV light source.

printing.

Some substrates require primer before printing. Please test materials beforehand or ask your sales representative.

Some examples shown in this catalogue are artificial renderings. Specifications, designs and dimensions shown in this catalogue may be subject to change without notice for technical improvements. The corporate and merchandise names in this catalogue are the trademarks or registered trademarks of the respective corporations. Inkjet printers use extremely fine dots, so colors may vary slightly after replacement of print heads. Also note that when using multiple printer units, colors could vary slightly from one unit to another due to slight individual differences

## Sitotehnika

Jugoslovenska 2, 11250 Beograd Tel: +381 11 6581274, 6581275 www.sitotehnika.rs office@sitotehnika.rs



Aerodromska 17, 71000 Sarajevo, tel: +387 33 719095, 66 002600, e-mail: sasastgraf@gmail.com Pilanska bb, 78000 Banja Luka, tel: +387 51 305280, 66 002400, e-mail: stgrafbl@gmail.com Lagja Kalabria pn, 10000 Priština, tel: +383 38 602080, 45 600641, e-mail: info@stgraf-ks.com Gorno Lisiče 210, 1000 Skoplje, tel: +389 2 3245777, 78 279756, e-mail: office@stgraf.mk












# UCJV300series UCJV300-75/107/130/160 **UCJV150-160**

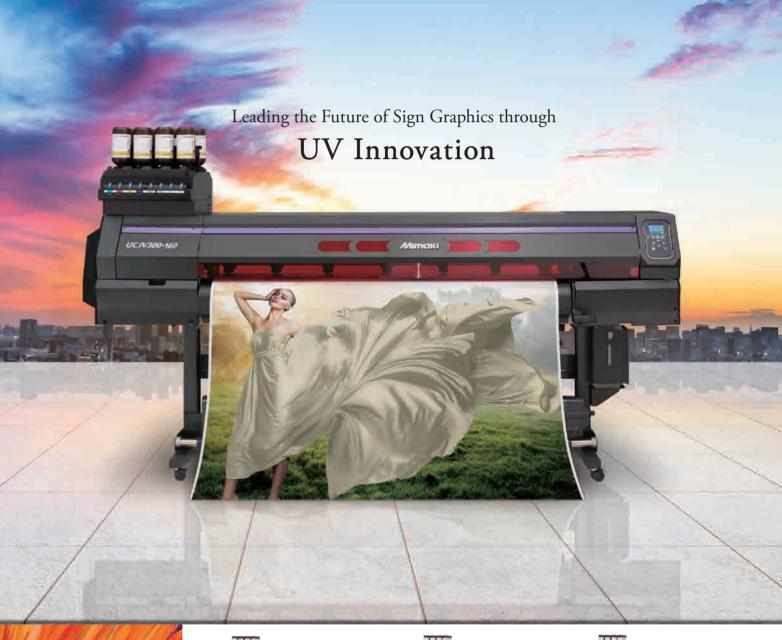













# UCJV300series UCJV150-160

UV-LED print enhancing the work

efficiency

Ecological

newly developed ink

A wide range

of materials


UV ink

Leading the Future of Sign Graphics through

**UV** Innovation

### Immediate processing and deliver are available by UV-LED.

With the UV ink property of immediate curing upon UV light irradiation no drying time is required. The post-processing and sign applying are possible instantly. Required time for production is saved to be possible to undertake even an order of tight scheduled work. It is immune from ink blocking while printing by multi layers or using white ink. There is no necessity to mind media stains nor to attend by operator.



Immediate materializing

an image idea by

Print & Cut

UV printing


Print & Cut


to broaden the range

of applications.

Expression selectable

UV Clear ink

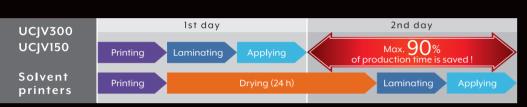

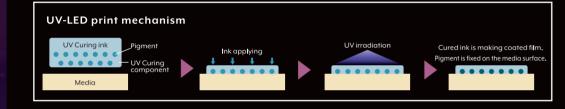

### Newly developed environmentally friendly UV ink, [LUS-170]

ing short-wavelength UV. The yellow ink of [LUS-170] is eco-friendly and nickel-free though the nickel is used in some general

## Flexible UV ink with the stretch ability up to 200%, [LUS-200]

The [LUS-200] ink has the stretch ability up to 200%. This capability suits stretch film applications such as vehicle wrapping. Printed films can be applied onto curved surface successively without ink cracking. [LUS-170] and [LUS-200] gained the [GREENGUARD Gold] certification, which is based on most strict globa standard of chemical substance diffusion.



The GREENGUARD Gold certification assures the product property conforms to schools and medical facilitie

### Printing is possible on a wide range of materials!

UV ink is printable to PVC and tarpaulin which are compatible with solvent, as well good matching with fabric, non specified ink receiving paper and PET. More varied applications with UCIV300 Series due to mountable white ink.










[UC|V Series] are equipped with cutting function of high performance and high efficiency to be able to make labels, stickers and

### [ID Cut] can help to cut easily even for multiple types data of small lot of each.

[ID Cut] is to print together ID (Barcode) for recognition of cutting details and media rotation with crop marks while placing the crop mark on the RIP. And then cut data of every print data is readable to start cutting automatically. Then with this function, cutting starts without any respective cutting order by operator at RIP software. It saves media losses by failure of data transmission.

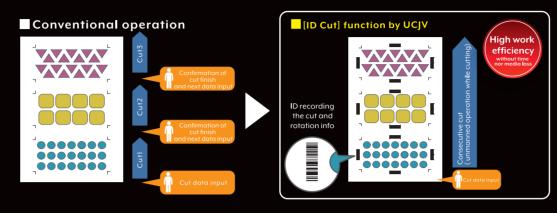

### Broad range of applications

Print & Cut with instant drying UV-curable ink can broaden the range of applications.



# UV Clear ink widening the scope of design and business possibility

LUS-170 Clear ink is available with UCIV300 Series.

The superior function [Mimaki Clear Control] equipped with UC|V300 Series can achieve beautiful clear printing suppressing the dust adherence and bubble generation by processing the clear ink print and UV-light irradiation simultaneously

There are two types of print modes you can choose from depending on your purpose: [alossy finish] of sense of class given by

Moreover, by installing RasterLink6Plus attached to the UCIV300 Series, [ARTISTA UV Texture Library] with 129 types of swatches in Adobe Illustrator can be used. The Library provides plenty of textures to widen the scope of design and business







#### Four-layer print [Day&Night Printing]

A very new advertising expression with showing different image effect between daytime and nighttime which can be created by four-layer print\*. [Day & Night Printing], a visible design change is presented by backlighting of four-layer print of [Color]+[Black]+[White]+[Color]. A proposal of highly designed sign can be put forward without any retouches of current simple light box but just ON/OFF of internal lamp. It can make a graphic change or an illumination of specified area etc







[Back light OFF]




[Back light ON]

### Five-layer print [Front&Back Printing]

Different printed design can appear on the "Front and Back" by one time print.

By printing on a transparent film with five layers, the [Front&Back Printing] of different design on the two sides is realized.

A different image of indoor and outdoor of one window sign, etc., it is a new proposal of more attractive sign with higher design property

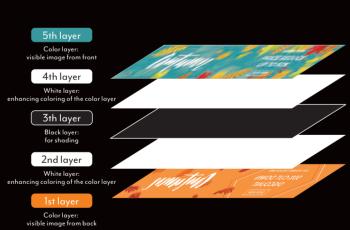





Multi-layer print

for a new advertisement expression

(Available for UCJV300 Series only)