

Descriptions

LG LM40000 is a embossed PVC film for protecting floor graphic images. It provides protection from damaging form UV radiation, scratch and abrasion. Moreover, it offers anti-slip property.(R9 Certification)

Features



200 micron **Embossed** PVC Film



Permanent & Clear adhesive



Double-side PE Coated Liner



Up to 3 years durability(Suitable for indoor)



Applications

- | | |
|--|---|
| ☐ Outdoor Signage | ☐ Window |
| ☒ Indoor Signage | ☐ Smooth Wall |
| ☐ Vehicle Wraps | ☐ Textured Wall |
| ☐ Vehicle slight curve | ☐ LSE (PP, PE, ABS) |
| ☐ Back-lit | ☐ Signboard (Lettering) |
| | ☒ Overlaminates |



Printers

- ☒ Solvent Inkjet
- ☒ Latex Inkjet
- ☒ UV Inkjet
- ☐ Screen Printing
- ☐ Not Printable



Roll Sizes

- ☐ 105cm (41in)
- ☐ 110cm (43in)
- ☒ 122cm (48in)
- ☐ 137cm (54in)
- ☐ 152cm (60in)
- ☐ 155cm (61in)
- ☐ 160cm (63in)

Physical Properties

Property	Specification	Test Method
Thickness (Including adhesive)	250 μ m $\pm$ 10%	Micrometer
Tensile strength	$\geq$ 1.8kgf	ASTM 882
Elongation	$\geq$ 100%	ASTM 882
Peel adhesion(24hrs)	$\geq$ 1,200g/in	180 peeling PSTC-1
Application temp.	$\geq$ 10 $^{\circ}$ C	18 to 25 $^{\circ}$ C optimum, on clean substrate
Gloss : LM41000	20 $\downarrow$	@60, in Machine Direction (ASTM D 2457)
Dimensional Stability	Max 0.5mm	Adhered to Aluminum Plate, Length Direction (100 $^{\circ}$ C Oven, 2hr , Average)
Release liner thickness	0.15mm $\pm$ 10%	Micrometer

The information provided on this sheet represents typical properties and does not constitute a specification. No liability will be accepted for errors and omissions and in no circumstances shall LG Hausys Ltd be liable for any loss or injury arising directly or as a consequence of the publication of this data sheet. All LG Hausys vinyl sold subject to our conditions of sale. LG Hausys also retains the right to change sizes and specifications of products without prior notice.

Recommendation



Shelf life

Shelf life is 12 months from factory shipment.

Storage condition: Free from excessive moisture, temperature, direct sunlight (20 °C x 50% R.H)



Durability

Durability is based on unprinted film vertical exposure

Please see Durability guide of LG Hausys (www.lghausys.com)



Lamination Film




Not Applicable.

Durability Guide



Durability Period & Exposure Conditions

Exposure to	Durability period		Examples (3 years product, Zone 1&2)
	Zone 1 & 2	Zone 3	
Vertical	100%	50%	3 years × 100% = 3 years
Non-Vertical	60%	30%	3 years × 60% = 2 years
Horizontal	30%	15%	3 years × 30% = 1 years

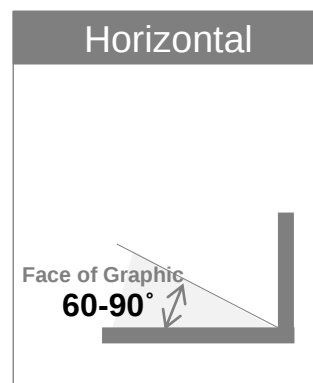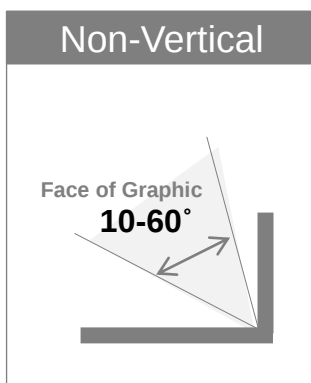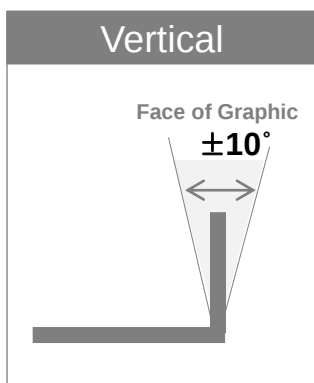

Please refer to LG Hausys durability guide of zone 1,2 and 3. (Zone system chart)



Jugoslovenska 2, 11250 Beograd
Tel: +381 11 6581274, 6581275
www.sitotehnika.rs
office@sitotehnika.rs



Aerodromska 17, 71000 Sarajevo, tel: +387 33 719095, 66 002600, e-mail: sasastgraf@gmail.com
Pilanska bb, 78000 Banja Luka, tel: +387 51 305280, 66 002400, e-mail: stgrafbl@gmail.com
Lagja Kalabria pn, 10000 Priština, tel: +383 38 602080, 45 600641, e-mail: info@stgraf-ks.com
Gorno Lisiče 210, 1000 Skopje, tel: +389 2 3245777, 78 279756, e-mail: office@stgraf.mk

Pratite nas:

